


The Ergomat Endurance is a pure Nitril rubber drainage mat designed to increase comfort while reducing tripping hazards, bodyaches, quality issues, and sick leaves resulting from employee short-term disability. This is the **ULTIMATE** mat for very wet environments.

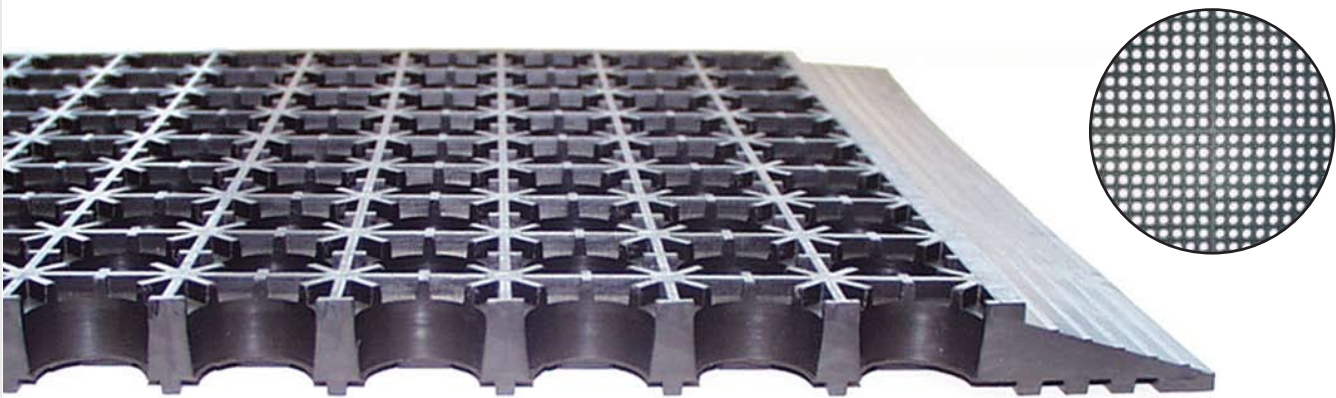

Unmatched Safety Features

Molded beveled edges

-They will never curl up, eliminating tripping hazards

Any size, any shape mat, always in one piece

-No overlapping or worn out connecting mats, also eliminating tripping hazards

Highest Quality

Raw virgin material only

-Unbeaten durability and lifetime ergonomic benefits

Not only anti-fatigue, but also true ergonomic benefits

-Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments by stimulating the body to increase blood circulation and alertness, reducing sick leave, workers' compensation and quality issues.

Silicone & latex-free

The Endurance Advantage

Chemical exposure will not affect the state of the mat; no curling up, swelling or expanding.

-Maintains the anti-fatigue properties, tripping hazards are prevented

Excellent anti-slip properties

Superior drainage

5-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase.

*It is considered normal usage when a person stands or walks on the Ergomat with regular footwear.

ERGOMAT Endurance

1.877.ERGOMAT[®].COM

Properties	Norm	ERGOMAT Endurance
Material		Nitril Rubber
Color		Black
Weight		13,000 g +/- 100 g // 28.7 lbs +/- 3.5 oz
Length without beveled edges		121.0 cm +/- 1% // 47.6" +/- 1%
Width without beveled edges		91 cm +/- 1% // 36.8" +/-1%
Thickness		19.5 mm // 3/4"
Density	DIN 53 479 A	1320 kg/m ³ +/- 3/4 %
Hardness	DIN 53 505	40-50 Sh A
Friction	AVK Standard	115 N
Abrasion Load = 5 N	DIN 53 516 / ISO 46 49	165 mm ³ // 6 1/2 in ³
Breaking point / tensile strength	EN ISO 527-1	5.3 Mpa
Elongation at break	EN ISO 527-1	900%
Tearing strength	ASTM D 624	18 N/mm
Electrical resistance Surface point to point % 50 RH	ANSI/ESD -S7.1-1994 And conforms to DS/EN 100015-1	>1 x 10 ¹⁰ Ω
Thermal Conductance	Table Value	0,01 W/m/°C
Flame Point	Table Value	400°C
Thermal properties min. use max. use max. short duration	The ergonomic properties remain	-40°C // -40°F 90°C // 194°F 600°C // 1112°F
UV-resistance		Inferior
Clean room application	FED.STD. NO.209D	Class 100 (ISO Class 5)
Warranty		5 years