


The Ergomat Softline is made of pure Nitril rubber and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leave. This is the **ULTIMATE** mat for extreme environments.

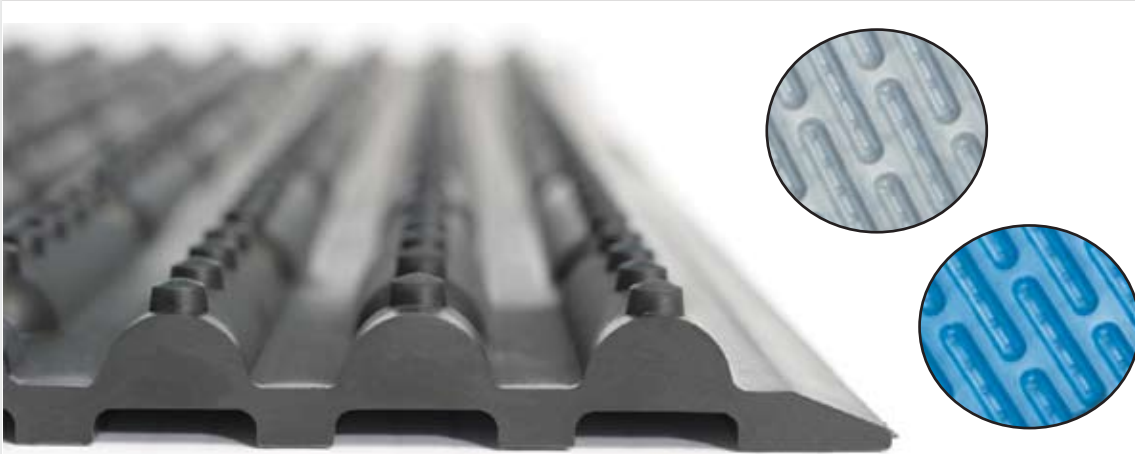

Unmatched Safety Features

Molded beveled edges

-They will never curl up, eliminating tripping hazards

Any size, any shape mat, always in one piece

-No overlapping or worn out connecting mats, also eliminating tripping hazards

Highest Quality

Raw virgin material only

-Unbeaten durability and lifetime ergonomic benefits

Silicone & latex-free

Not only anti-fatigue, but also true ergonomic benefits

-Unique ergonomic designs, eliminating and preventing common problems encountered in standing environments by stimulating the body to increase blood circulation and alertness, reducing sick leave, workers' compensation and quality issues.

The Softline Advantage

Chemical exposure will not affect the state of the mat; no curling up, swelling or expanding.

-No tripping hazards. Maintains the ergonomic properties

Meets USDA/CFIA standards

Choice of 3 colors: grey, black and blue

-Cross contamination risks are prevented

Cleanroom Class 5 (100)

Unique design allows for exceptional anti-slip properties and easy cleaning of metal chips

Withstands sparks and welding chips up to 1100°F (600°C)

3-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase.

*It is considered normal usage when a person stands or walks on the Ergomat with regular footwear.

ERGOMAT Softline

1.877. **ERGOMAT**[®].COM

Properties	Norm	ERGOMAT Softline
Material		Nitril Rubber
Color		Black, Grey, Blue
Weight		4600 g +/- 50 g // 9.54 lbs +/- 1.75 oz
Length without beveled edges		89,5 cm +/- 1% // 35 1/2" +/- 1%
Width without beveled edges		60,0 cm +/- 1% // 23 5/8" +/- 1%
Thickness		15 mm 5/8 in
Density	DIN 53 479 A	1320 kg/m ³ +/- 10 %
Hardness	DIN 53 505	45-55 Sh A
Friction	AVK Standard	45 N
Abrasion Load = 5 N	DIN 53 516 / ISO 46 49	100 mm ³ // 4 in ³
Elongation at break	EN ISO 527-1	460%
Breaking point / tensile strength	EN ISO 527-1	6,8 Mpa
Tearing strength	ASTM D 624	32 N/mm
Electrical resistance Surface point to point % 50 RH	ANSI/ESD -S7.1-1994 And conforms to DS/EN 100015-1	>1 x 10 ¹⁰ Ω
Fire behavior	DIN 4102-B1 Part 14/	Not tested
Insulation Resistance	EN 60 335-1994	11 kV
Flame Point	Table Value	400°C
Thermal Conductance	Table Value	0,01 W/m/°C
Thermal properties		
min. use		-40°C // -40°F
max. use	The ergonomic properties remain	110°C // 230°F
max. short duration		600°C // 1112°F
UV-resistance		Inferior
Clean room application	FED.STD. NO.209D	Class 100 (ISO Class 5)
Warranty		3 years