


The Ergomat AB Classic is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the ultimate mat for dry environments or where static electricity control is a must.

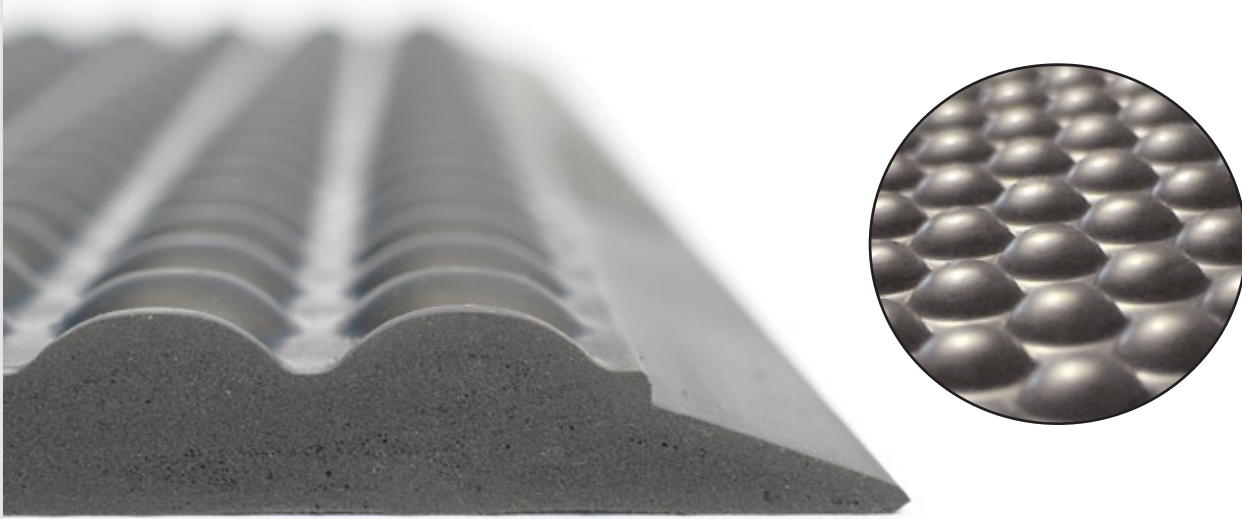

Unmatched Safety Features

Molded beveled edges

-They will never curl up, eliminating tripping hazards

Any size, any shape mat, always in one piece

-No overlapping or worn-out connecting mats, also eliminating tripping hazards

Highest Quality

Raw virgin material only

-Unbeaten durability and ergonomic relief

Not only anti-fatigue, but also true ergonomic benefits

-Unique ergonomic design, eliminating and preventing common problems encountered in standing environments, by stimulating the body to increase blood circulation and alertness, reducing sick leaves, workers' compensation and quality issues.

The AB Classic Advantage

Solid mat throughout, no hollow bubbles that collapse.

-Long-term solution to keep the "bounce back" effect throughout the warranty period.

Anti-static properties

Silicone & latex-free

Cleanroom ISO Class 5 (100)

8-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase. The warranty only covers the replacement of the product, no direct or indirect costs are covered.

* It is considered normal usage when a person stands or walks on the Ergomat with regular footwear in an environment where the temperature is under 25° C (77° F) and the humidity is below 80%.

ERGOMAT AB Classic

1.877. **ERGOMAT**.com

Properties	Standard	ERGOMAT Classic
Material		Foamed Polyurethane
Color		Anthracite
Weight		2500 g +/- 50 g // 5.5 lbs +/- 0.1 lbs
Length without beveled edges		90 cm +/- 1% // 35.5" +/- 0.38"
Width without beveled edges		60 cm +/- 1% // 23.5" +/- 0.38"
Thickness		15 mm // 0.62"
Density	ISO 2781	380 kg/m ³ +/- 10 %
Hardness	DIN 53505	22-30 Sh A
Compression Pressure face = ø 100 mm % by pressure of 240 kg	Tinby A/S standard	50%
Abrasion Load = 5 N	ISO 46 49 (5 N)	180 mm ³ // 7 in ³
Breaking point / tensile strength	EN ISO 527-1	2 Mpa
Elongation at break	EN ISO 527-1	500%
Tearing strength	ASTM D 624	4 N/mm
Electrical resistance Surface point to point % 50 RH	ESD STM7	1 x 10 ⁹ Ω - 5 x 10 ⁹ Ω
Fire behavior	EN 13501-1 (DIN 4102-B1 Part 14)	Not tested
Thermal properties Minimum use Maximum use Maximum short duration	The ergonomic properties remain	0°C // 32°F 80°C // 176°F 120°C // 248°F
UV-resistance		Inferior
Hydrolytic resistance		Inferior
Cleanroom application	EN ISO 14644-1	ISO Class 5 (100)
Warranty		8 years